





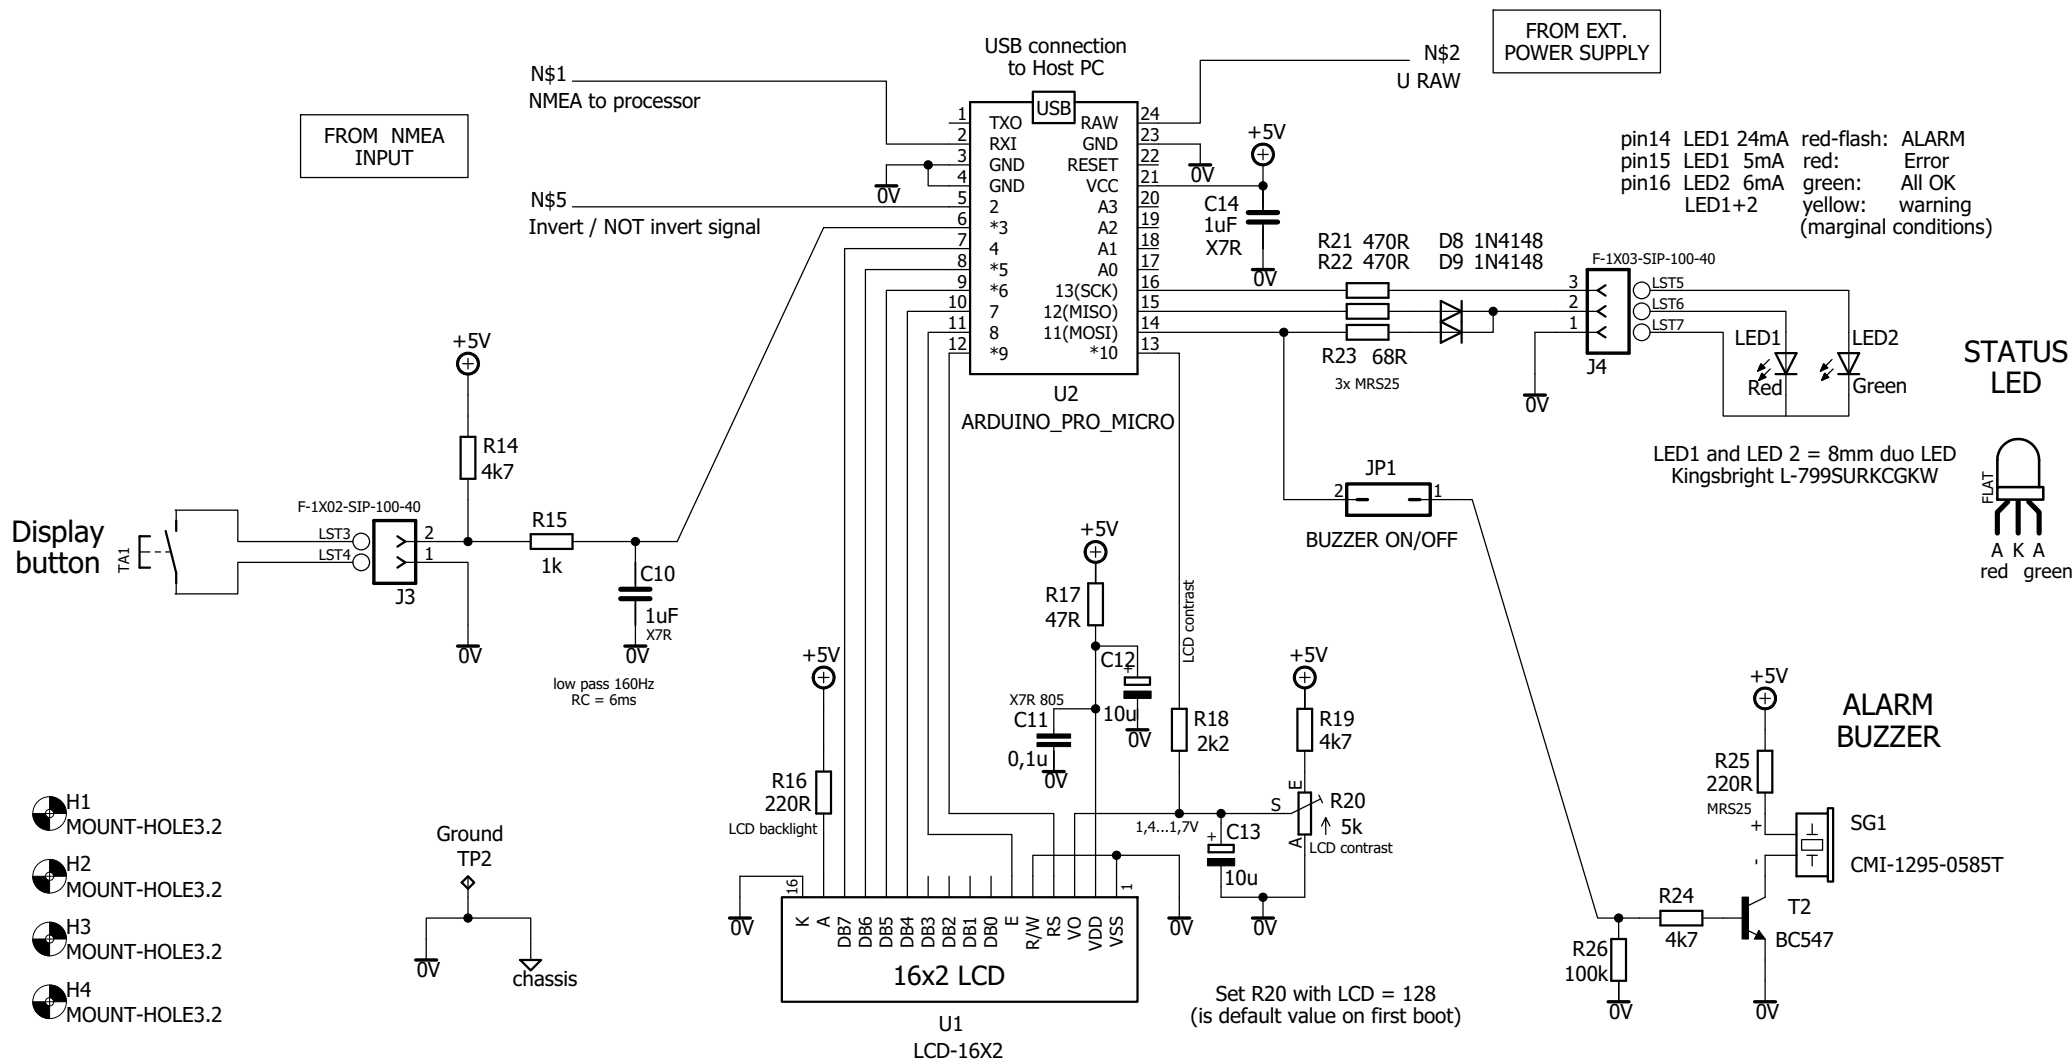

- H1 MOUNT-HOLE3.2
- H2 MOUNT-HOLE3.2
- H3 MOUNT-HOLE3.2
- H4 MOUNT-HOLE3.2

Baudrate: 4800 baud is NMEA standard, 9600, 19200, 38400 and 57600 baud also supported. TTL and RS-232 compatible. (use 8N1) Auto adjusting for inverted / non inverted signals.

Power: External 9V....15V / 50mA...130mA or 5V using USB port, auto switching.



Miedema Geluidstechniek  
Rika Hopperlaan 20 3584 GN Utrecht  
Tel. 030-2511913 info@miedemageluid.nl

TITLE: GPS monitor for GPSDO - digital

File: GPSmonitor v125

REV: 1.25

Date: 27-01-2025 11:06

Get: Gertjan Miedema

